

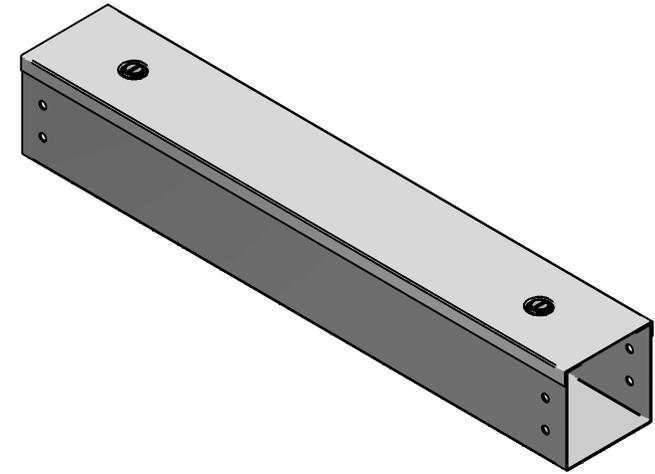


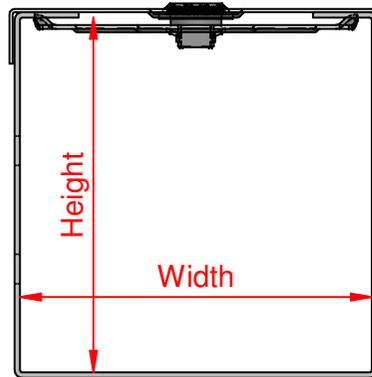

QuickFix

Size	Width	Height
TK22	50.8	50.8
TK32	76.2	50.8
TK33	76.2	76.2
TK42	101.6	50.8
TK43	101.6	76.2
TK44	101.6	101.6
TK62	152.4	50.8
TK63	152.4	76.2
TK64	152.4	101.6
TK66	152.4	152.4
TK82	203.2	50.8
TK83	203.2	76.2
TK84	203.2	101.6
TK86	203.2	203.2
TK92	228.6	50.8
TK93	228.6	76.2
TK94	228.6	101.6
TK96	228.6	152.4
TK99	228.6	228.6

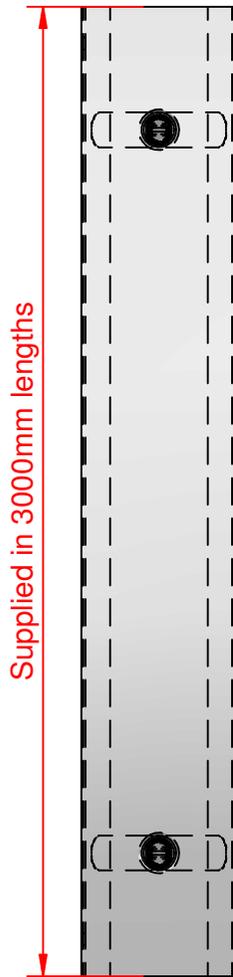

- ✓ Fast fitting **UniBolt** reduces installation time by as much as 80%
- ✓ **IP4X compliant** as standard
- ✓ **Completes the range** of fast fitting and innovative Cable Management Solutions



In accordance with Unitrunk's policy of continuous improvement, Unitrunk reserves the right to change specifications and designs without notice. Data is the copyright of Unitrunk Ltd and not to be reproduced or passed to a third party without written consent.

Cable Trunking & Ducting Standard BS EN 50085-1 & BS EN 50085-2-1	Material Standard BS EN 10346 (Pre Galv)		Quality Recognition	
Unitrunk Head Office: 4 Altona Road, Lisburn, BT27 5QB +44 28 9262 5100 info@unitrunk.co.uk unitrunk.co.uk unitrunk.ie	Lid Fixing Retained Toggle	Torque Value 3 N m		
	Data Sheet Reference Trunking Lengths	Revision 2.01		



UNITRUNK