



Speedway® SW6 Pre-Galvanised Cable Ladder

Speedway® 6 (SW6) Pre-Galv. Extra Heavy Duty Cable Ladder is manufactured in 3m lengths as standard, 6m lengths available to order.

The cable ladder is available in standard widths of 150mm, 300mm, 450mm, 600mm, 750mm, 900mm and 1050mm.

Additional widths are available on request.

Rung spacing is 300mm as standard.

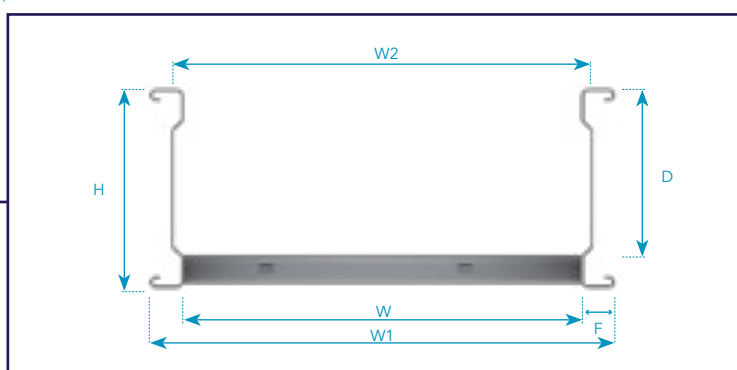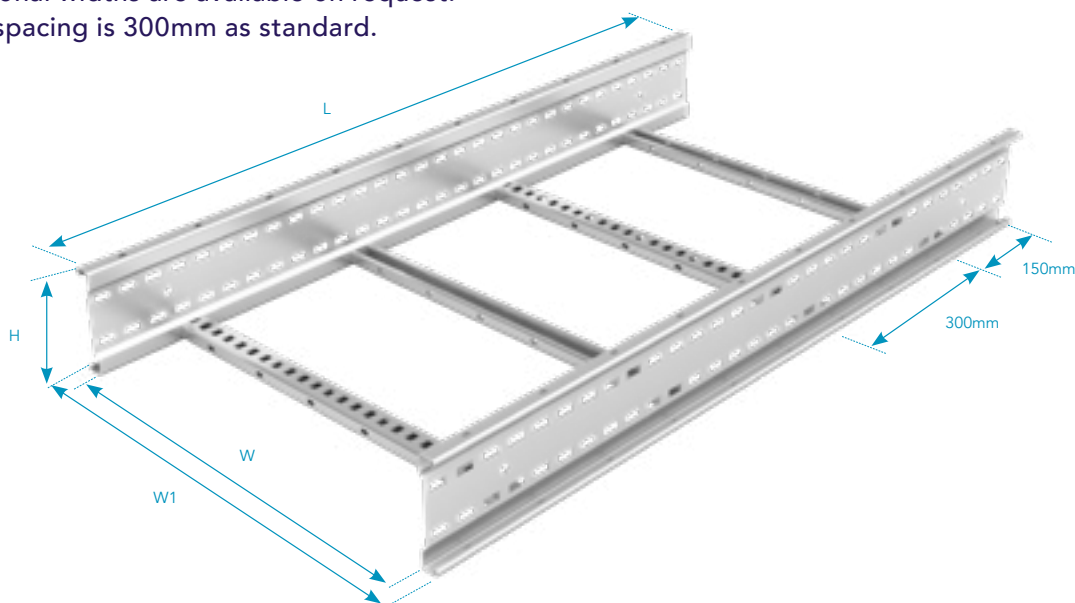

Part Code	No. of Rungs	Dimensions (mm)				Weight (kg)
		W	W1	L	H	
SW6-SL3-150-QQ	10	150	200	3000	150	15.63
SW6-SL3-300-QQ		300	350			17.13
SW6-SL3-450-QQ		450	500			18.63
SW6-SL3-600-QQ		600	650			20.12
SW6-SL3-750-QQ		750	800			21.62
SW6-SL3-900-QQ		900	950			23.12
SW6-SL3-1050-QQ		1050	1100			24.62

Height	H	150mm
Loading Depth	D	125mm
Ladder Width	W	100mm to 1050mm
Overall Width	W1	W + 50mm
Maximum Internal Width	W2	W + 14mm
Flange Width	F	25mm